



NOTCH ADHESIVES

REINFORCED
POLYMER
TECHNOLOGY



Innovation, Collaboration and Integrity



- The sustainable choice in tiling and flooring products ■



About Notch Adhesives

Notch Adhesives is UAE based certified Company and the products find use in the Paints, Packaging, Furniture, Textiles, Construction and many other industries. Notch Adhesives has a well equipped laboratory to develop products for various applications and is committed to manufacture products at affordable prices for its customers. The Company believes in constantly upgrading its products and introducing new products to meet the ever growing demands of the various industries. The Company has a good marketing network and believes in developing business on a long term association basis rather than as an adhoc one. With the addition of more production capacity the export market is being actively pursued and is receiving a positive response. The Company is presently exporting its products to countries in India, Africa and the Middle East.

Notch Adhesives besides manufacturing polymer emulsion is also in the business of indenting and marketing of bulk raw materials. The company is also diversifying and expanding its activities in other areas, but all under the umbrella of Notch Adhesives which would also aid to consolidate the company's business objectives.



The Company's philosophy to improve "the quality of life for all", stems from the strong belief and desire to make best use of the available resources, minimize pollution and provide value addition to the products so as to give optimum benefits to its customers and society at large.

Reinforced Polymer Technology Range

Pro Tile



- Applicable for interior use only
- Built in flexibility & Non slippery
- Water Resistance
- Suitable for all kind of Tiles
- ECO friendly
- Confirm to BS EN 12004 C1-T
- Single component just add water
- Pro Tile c1-T Grey
- Pro Tile c1-T White



Pro Fix



- Applicable for interior and exterior use
- Non slippery
- Highly Adhesive strength
- Suitable for all kind of Tiles,
- Natural Stones & Mosaics
- ECO Friendly
- Confirm to BS EN 12004 C2-TE
- Pro fix c2TE Grey
- Pro fix c2TE White



Reinforced Polymer **Technology Range**

Pro Flexy



Tiling Products



- Extended Pot life of 180 minutes
- Improved bed thickness of 2 to 10mm
- Applicable for interior and exterior use
- Suitable for all kind of Tiles, Natural stones & Mosaics
- ECO friendly
- Confirm to BS EN 12004 C2TE-S1
- Pro flexi C2TE-S1 White
- Pro flexi C2TE-S1 Grey

Adhesives, grouting products, sealants, screed mortars, primers, smoothing and skimming compounds and complementary products: choosing Notch Adhesive means not only being certain of the end result, but also the availability of a support structure with the ability to Pretty reassuring when operating in a sector with activities ranging from installing and grouting ceramics, mosaics and natural stone on waterproofing layers in areas such as swimming pools, Turkish baths and the facades of residential properties and commercial buildings.



Reinforced Polymer **Technology Range**

Probond T

Two component high performance Polyurethane. Adhesives for **ceramic. Tiles. And stone material.**

Where to use

Indoor and outdoor, bonding of wall and floor ceramic tiles, stone material mosaics, etc. on: screeds, renders, concrete, asphalt, wood, metal, PVC, reinforced polyester, fibre-cement, gypsum, gypsum board, gypsum panels, etc.

Technical Data

Open time: 50 minutes.

Waiting time before grouting: 12 hours.

Set to light foot traffic: approx. 12 hours.

Ready for use: approx. 7 days.

Deformability: highly deformable.

Colours: White

Application: N° 4 or 5 notched trowel.

Storage: 24 months.

Consumption: 2.5 -5 kg/m².

Packaging: 5 KG



Reinforced Polymer **Technology Range**

Pro-Epoxy

Two-component acid-resistant epoxy adhesive. Can also be used as a grout.

Application

Pro-Epoxy is an improved reaction resin and slip-resistant adhesive (R2T) suitable for fast setting acid-resistant bonding of ceramic tiles, stone material, fibre-cement, concrete, and other building material on substrates normally used in building.



Technical Data

Pot life: 50 minutes.

Open time: 12 hours.

Set to light foot traffic: approx. 12 hours.

Ready for use: 4 days. After 4 days, surfaces can undergo chemical aggression.

Colours: 16

Application: Notched trowel n. 4, 5, 6 or 10.

Storage: 24 months.


Consumption as an adhesive: 2-4 kg/m².

Packaging: 5 KG



Solutions For **Every Type of Site**

Every site has its own unique challenges. This is why Notch Adhesive are organised according to site requirements and for areas of use with the aim to offer all professionals from the building industry a complete service.

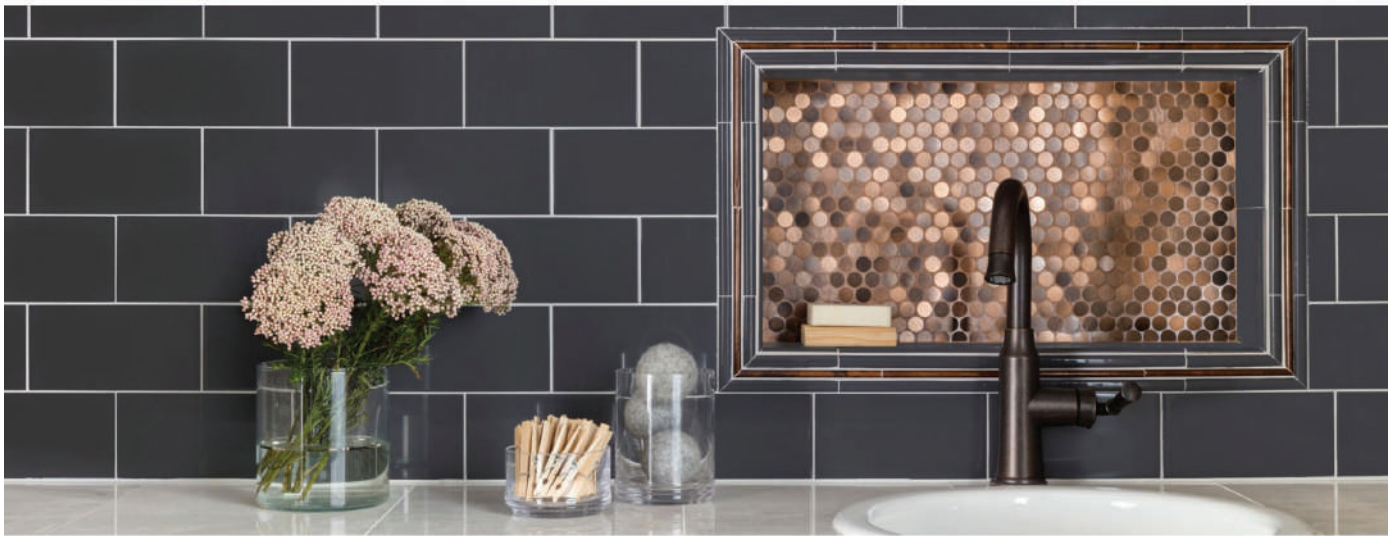

Notch Adhesive products have been used in thousands of projects all around the world, from large-scale projects to commercial spaces, from residential projects to works of public interest: our technical assistance and consultancy service are an integral part of our offer and of our daily commitment.

We meet the needs of all our clients with the most comprehensive offer in the world of products for the building sector. We are committed to using the best raw materials and employing the most qualified personnel so we can always offer the best product possible.





Do You Have A Construction Project We Can Help With?



📍 Al Zareen Towers, Shaikh Zayed Road, Between
2nd and 3rd Interchange Dubai, U.A.E.

☎ 1.800.458.556

🕒 Mon – Sat . 9.00 – 18.00

✉ info@notchadhesives.com

🌐 www.notchadhesives.com